






|                              |                                  |
|------------------------------|----------------------------------|
| Brand                        | Ruland                           |
| Hex Wrench Size              | 6.0 mm                           |
| Material                     | Aluminum                         |
| Bore (B1)                    | 30 mm                            |
| Bore (B2)                    | 28 mm                            |
| Keyway                       | No                               |
| B1 Max Shaft Penetration     | 40.2 mm                          |
| B2 Max Shaft Penetration     | 40.2 mm                          |
| Screw Material               | Alloy Steel                      |
| Screw Finish                 | Black Oxide                      |
| Bore Tolerance               | +0.03 mm / -0.00 mm              |
| ISO 9001:2015                | Certified                        |
| REACH                        | Compliant                        |
| RoHS3                        | Compliant                        |
| Conflict Minerals            | Compliant                        |
| Tariff Code                  | 8483.60.8000                     |
| Number of Screws             | 2 ea                             |
| Seating Torque               | 39 Nm                            |
| O.D. (D)                     | 2.750 in (69.9 mm)               |
| Length (L)                   | 3.431 in (87.1 mm)               |
| Dynamic Torque Reversing     | 26.13 Nm                         |
| Torsional Stiffness          | 237 Nm/Deg                       |
| Shaft Tolerance              | +0.000 mm / -0.013 mm            |
| Zero-Backlash?               | Yes                              |
| Balanced Design              | Yes                              |
| UNSPC                        | 31163018                         |
| Cap Screw                    | M8                               |
| Static Torque                | 104.5 Nm                         |
| Dynamic Torque Non-Reversing | 52.25 Nm                         |
| Temperature                  | -40°F to 200°F (-40°C to 93°C)   |
| Maximum Speed                | 10000 RPM                        |
| Angular Misalignment         | 2.0 deg                          |
| Parallel Misalignment        | 0.30 mm                          |
| Axial Motion                 | 0.76 mm                          |
| Bellows Attachment Method    | Epoxy                            |
| Length Tolerance             | +/- 0.76 mm                      |
| Recommended Hex Key          | Metric Hex Keys                  |
| B1 Min Shaft Penetration     | 19.1 mm                          |
| Product Group                | Bellows Coupling Standard Length |
| B2 Min Shaft Penetration     | 19.1 mm                          |

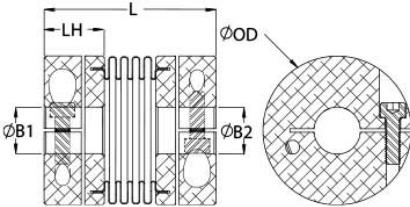

COMPONENT

Bellows Coupling Standard Length



Pacific International Bearing, Inc.  
33258 Central Ave, Union City, CA 94587 1-800-228-8895,  
510-512-7000,  
info@pibsales.com  
www.pibsales.com

This file and any associated information and specifications are provided for reference and evaluation purposes only, and is subject to change without notice. PIB makes no representations, warranties or guarantees as to the appropriateness, accuracy, completeness, or suitability for any purpose, of the file, information or specifications. You are solely responsible for the use of the file, information or specifications.

**MBC70-30-28-A**  
**Ruland**  
30mm X 28mm Bores, 69.9mm, Od, 87.1mm Length, Bellows Coupling,  
High Stiffness, Aluminum

|        |
|--------|
| UNIT   |
| Metric |
| SHEET  |